


GABLE END WORKS

INSTALL SUITABLE SCAFFOLD TO ASSESS CONDITION OF GABLE BRICKWORK
POINT UP MISSING MORTAR JOINTS AND RE-BED ANY LOOSE BRICKS
REMOVE SCAFFOLDING

EXISTING DOOR TO BE REFURBISHED
ALLOW FOR NEW HARDWARE FOR
ACCESS BOTH SIDES INCLUDING
EMERGENCY PUSH PAD FACILITY

EXISTING DOOR TO BE REFURBISHED
ALLOW FOR NEW HARDWARE FOR
ACCESS BOTH SIDES INCLUDING
EMERGENCY PUSH PAD FACILITY

ALLOW FOR NEW RWP DOWNPIPE &
SECURE CORNER SHEET METAL ROOFING

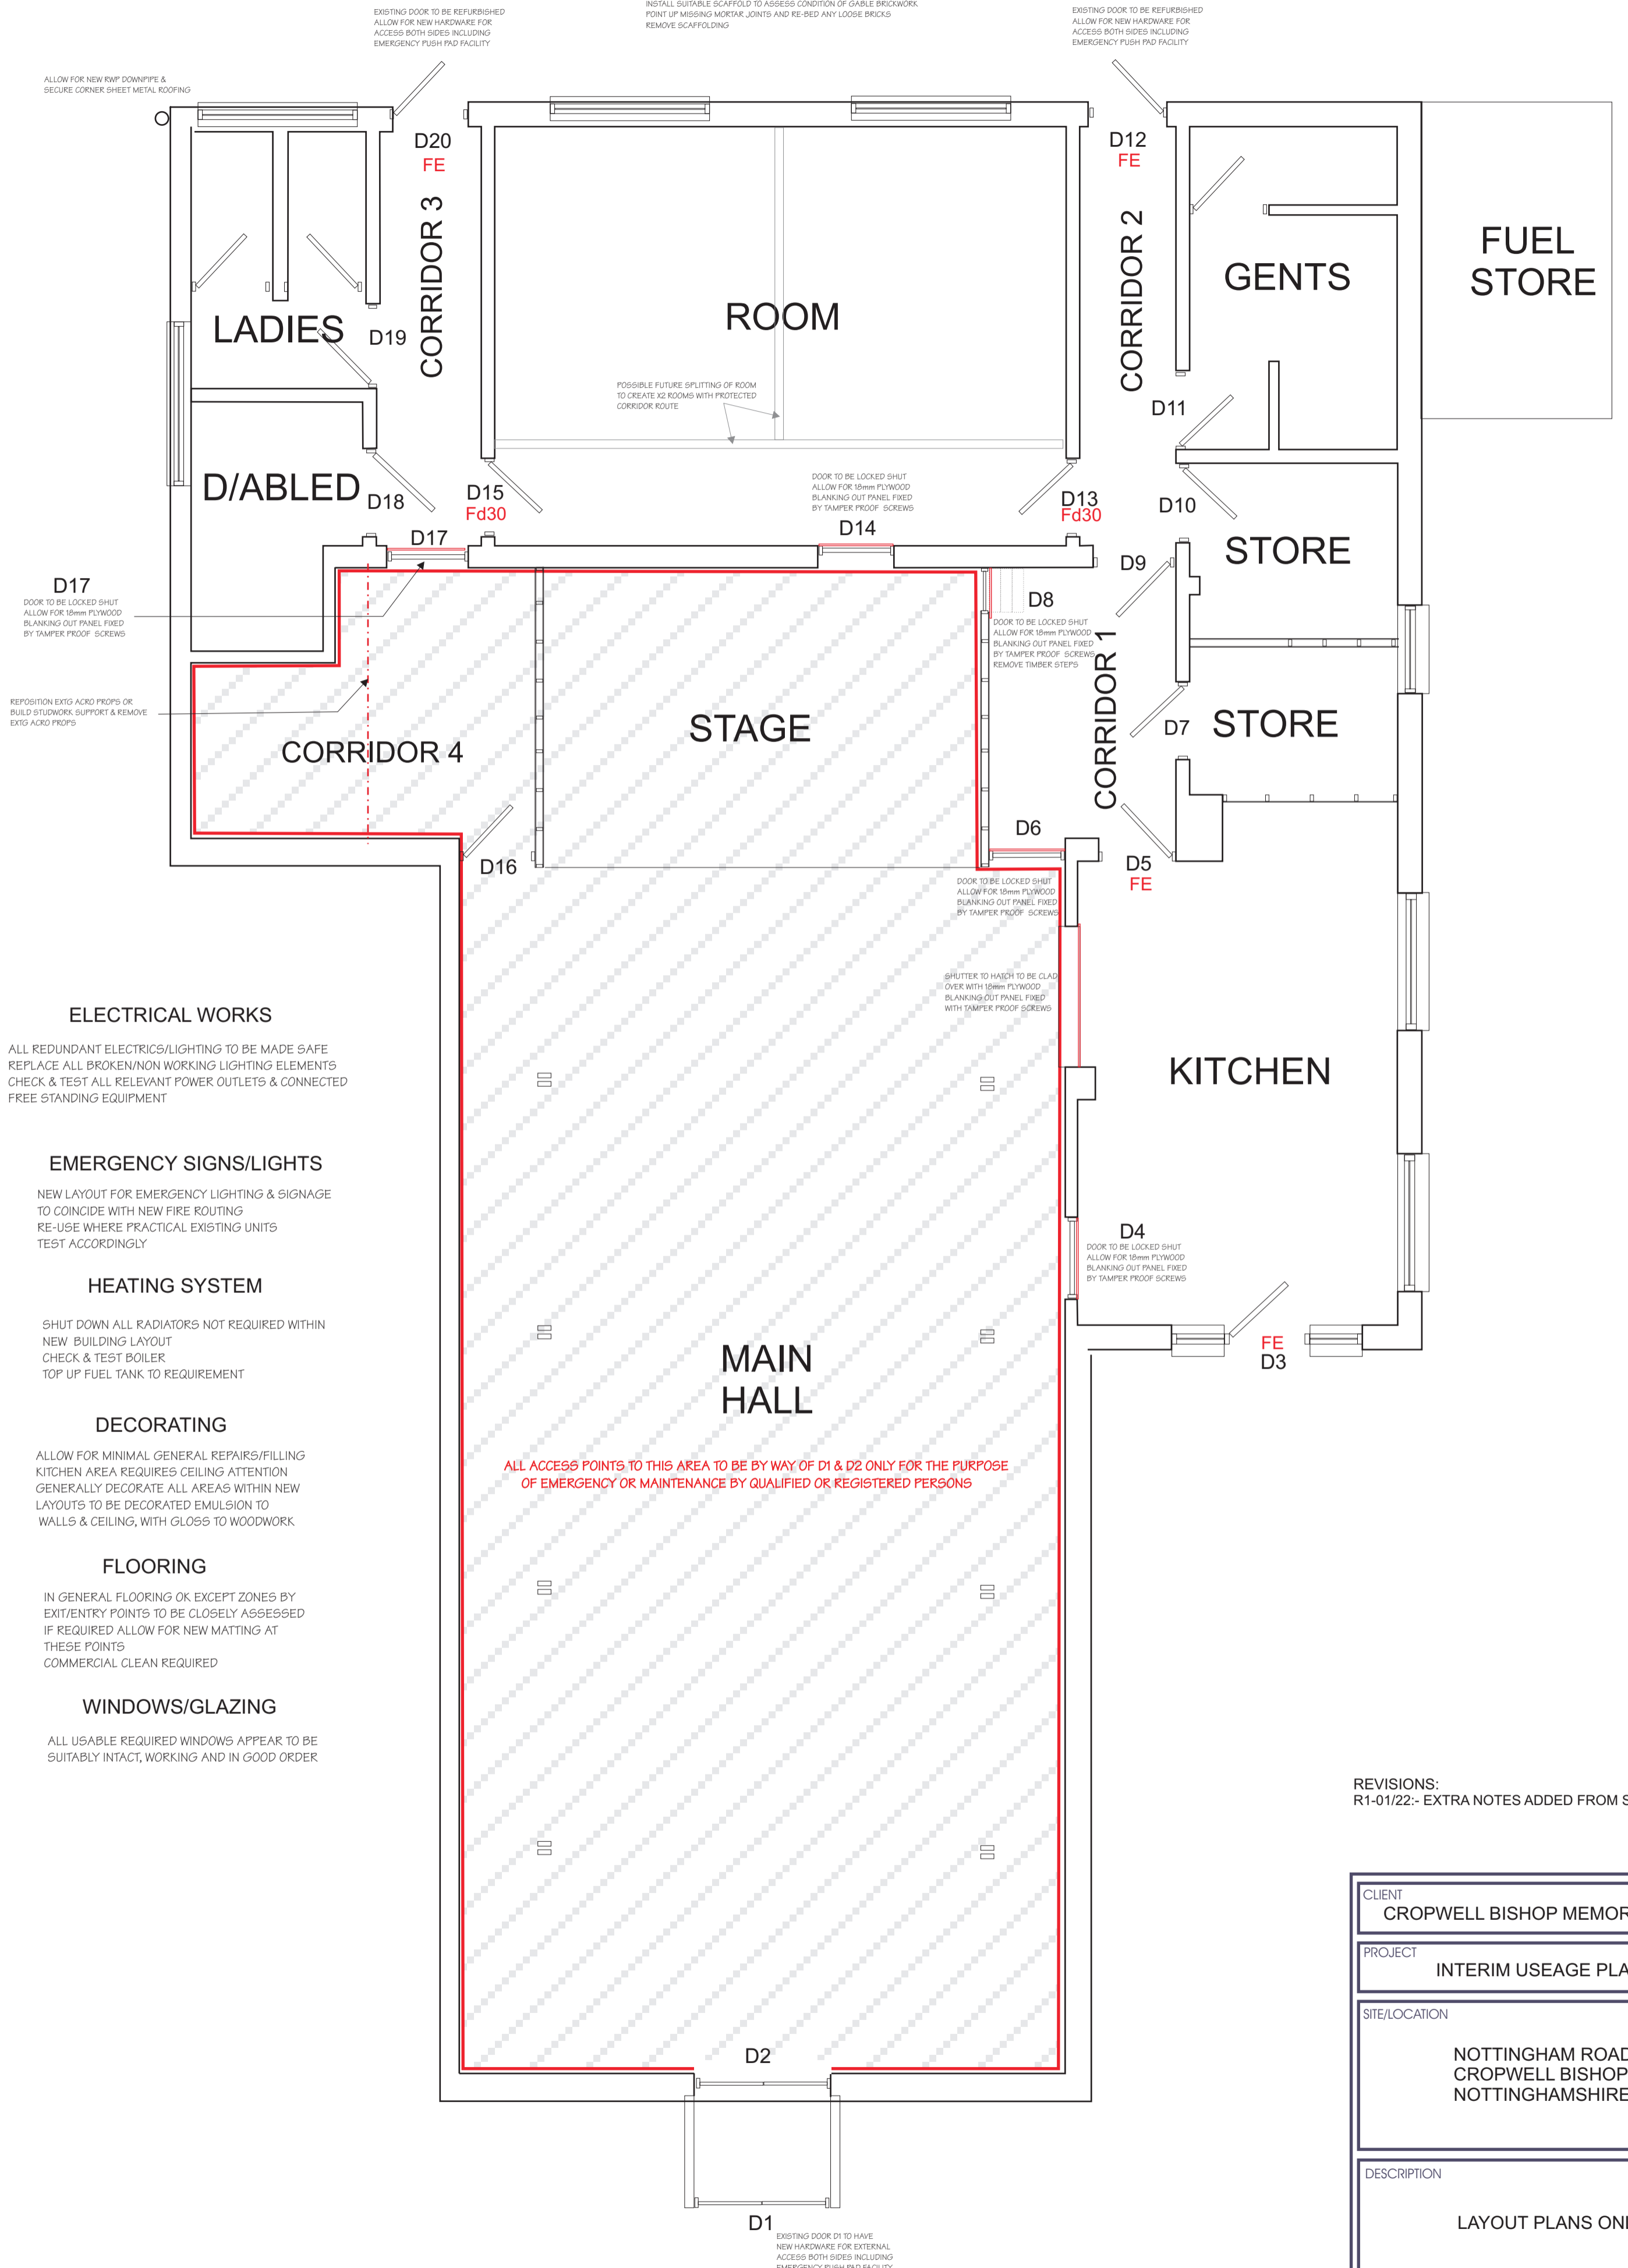

ELECTRICAL WORKS

ALL REDUNDANT ELECTRICS/LIGHTING TO BE MADE SAFE
REPLACE ALL BROKEN/NON WORKING LIGHTING ELEMENTS
CHECK & TEST ALL RELEVANT POWER OUTLETS & CONNECTED
FREE STANDING EQUIPMENT

EMERGENCY SIGNS/LIGHTS

NEW LAYOUT FOR EMERGENCY LIGHTING & SIGNAGE
TO COINCIDE WITH NEW FIRE ROUTING
RE-USE WHERE PRACTICAL EXISTING UNITS
TEST ACCORDINGLY

HEATING SYSTEM

SHUT DOWN ALL RADIATORS NOT REQUIRED WITHIN
NEW BUILDING LAYOUT
CHECK & TEST BOILER
TOP UP FUEL TANK TO REQUIREMENT

DECORATING

ALLOW FOR MINIMAL GENERAL REPAIRS/FILLING
KITCHEN AREA REQUIRES CEILING ATTENTION
GENERALLY DECORATE ALL AREAS WITHIN NEW
LAYOUTS TO BE DECORATED EMULSION TO
WALLS & CEILING, WITH GLOSS TO WOODWORK

FLOORING

IN GENERAL FLOORING OK EXCEPT ZONES BY
EXIT/ENTRY POINTS TO BE CLOSELY ASSESSED
IF REQUIRED ALLOW FOR NEW MATTING AT
THESE POINTS
COMMERCIAL CLEAN REQUIRED

WINDOWS/GLAZING

ALL USABLE REQUIRED WINDOWS APPEAR TO BE
SUITABLY INTACT, WORKING AND IN GOOD ORDER

REVISIONS:
R1-01/22:- EXTRA NOTES ADDED FROM SITE MEETING

CLIENT	CROPWELL BISHOP MEMORIAL HALL		
PROJECT	INTERIM USAGE PLAN		
SITE/LOCATION	NOTTINGHAM ROAD CROPWELL BISHOP NOTTINGHAMSHIRE		
DESCRIPTION	LAYOUT PLANS ONLY		
DESIGN OR PRELIMINARY INFORMATION ONLY	<input checked="" type="checkbox"/>	CONSTRUCTION	<input type="checkbox"/>
FOR APPROVAL	<input type="checkbox"/>	AS BUILT	<input type="checkbox"/>

